


# IMB-385

## Micro-ATX Motherboard

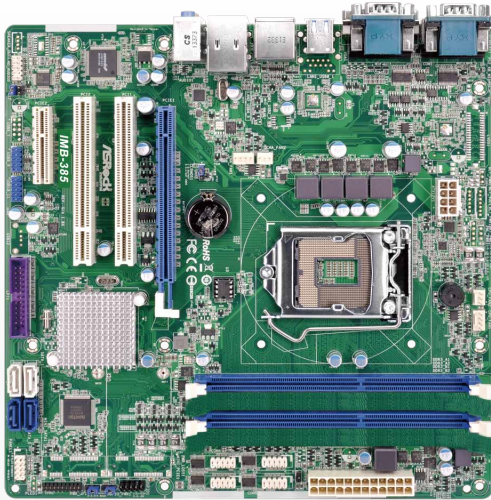

### Spotlight Features

- Socket LGA1150 for Intel Core i7/i5/i3/Celeron (Haswell)
- Intel® H81 Express Chipset
- Integrated Intel® HD Graphics Built-in Visuals
- Supports DDR3 1066/1333/1600MHz, 2 x Long-DIMM, up to 16GB system memory
- 2 x COM (RS-232/422/485), 4 x COM (RS-232)
- 1 x HDMI, 1 x VGA, /DisplayPort
- 2 x USB 3.0, 6 x USB 2.0, 2 x SATA3, 2 x SATA2
- 2 x PCI, 1 x PCIe x16, 1 x PCIe x4
- Gigabit LAN : 1 x Intel I217v (without v-Pro support),
- 1 x TPM Header

### Specifications

Processor System	
Dimension	Micro-ATX (9.6-in x 9.6-in)
CPU	Socket LGA1150 for Intel® Core i7/i5/i3/Celeron (Haswell)
Core Number	(By CPU Max 4)
Max Speed	(By CPU)
L3 Cache	(By CPU)
Chipset	H81
BIOS	UEFI
Expansion Slot	
PCI	2
Mini-PCIe	0
mSATA	0
PCIe	1 (x16)+ 1 (x4)
CFast Card Socket	0
Memory	
Technology	Dual Channel DDR3 1066/1333/1600 MHz SDRAM
Max.	16GB
Socket	2 x Long DIMM
Graphics	
Controller	Intel® HD Graphics (By CPU)
VRAM	Shared Memory
VGA	Supports max resolution 1920x1200
LVDS	No
HDMI	Supports HDMI 1.4a, max resolution 1920 x 1200
DVI	No
Display Port	Supports max resolution 2560x1600
Multi Display	Yes (Dual Display)
Ethernet	
Interface	10/100/1000 Mbps
Controller	GbE LAN: Intel® I217V
Connector	1 x RJ-45
SATA	
Max Data Transfer Rate	2 x SATA2 (3.0Gb/s), 2 x SATA3 (6.0Gb/s)

Rear I/O	
VGA	1
HDMI	1
DVI-I/D	0
Display Port	1
Ethernet	1
USB	6 (2 x USB 3.0 compliant, 4 x USB 2.0 compliant)
Audio	3 (Mic-In, Line-Out, Line-In)
Serial	2 (RS-232/422/485)
e-SATA	0
PS/2	1 (Combo)
Internal Connector	
USB	2 * USB 2.0 headers
LVDS/Inverter	0
VGA	0
Serial	4 (RS-232)
SATA	2 x SATA2 (3.0Gb/s), 2 x SATA3 (6.0Gb/s)
m-SATA	0
Mini-PCIe	0
Parallel	1
IrDA	0
GPIO	4 x GPI + 4 x GPO
SATA PWR Output Con	0
Speaker Header	0
Watchdog Timer	
Output	Output from super I/O to drag RESETCON#
Interval	256 Segments, 0,1,2...255 Sec/Min
Power Requirements	
Input PWR	ATX PWR (8+24 pin)
Power On	AT/ATX Supported AT : Directly PWR on as power input ready ATX : Press button to PWR on after power input ready
Environment	
Operating Temperature	0°C – 60°C